


LinearPac CWS™

1200MM COLOUR & WATTAGE SWITCHABLE 180LM/W MODULAR ANTI-CORROSIVE

- Colour & Wattage Switchable Modular High-Efficiency IP66 Corrosion-Resistant Linear Batten robust luminaire designed for the most demanding indoor and outdoor applications.
- Fully modular design allows tool-free maintenance of the LED PCB and driver at end of lifetime, as well as plug-and-play extensions with microwave sensor, microwave sensor with dimming/corridor function, emergency kit with self-test, or DALI dimming driver.
- IP66 rated with cable glands on both ends and rear entry for quick through-wiring via terminal blocks. IK08 polycarbonate diffuser and housing are vandal-proof, with 850° glow wire resistance. Suitable for ambient temperatures from -20 °C to +45 °C.
- Quick-release hinged gear tray with durable 304 stainless steel anti-theft clips ensures fast installation and simplified maintenance. Once the base is secured, the diffuser simply clips into place. Cable gland, mounting/suspension bracket and anti-theft screws included.
- Available with 3 wattage and 3 colour selections for maximum flexibility – the perfect retrofit solution for single and twin corrosion-resistant T8 fluorescent fittings.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
AC156046	Non-Dimmable	3000 / 4000 / 6500K	24 / 34 / 40W	4320-7200lm	Up to 180lm/W	80

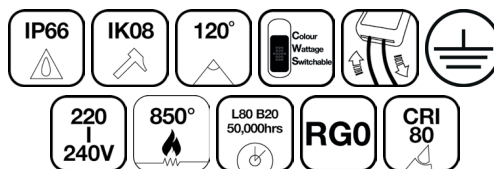

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

LinearPac CWS™

1200MM COLOUR & WATTAGE SWITCHABLE 180LM/W MODULAR ANTI-CORROSIVE

Specifications and Benefits

Ingress Protection Rating	IP66
IK Rating	IK08
Operating Temperature Range	-20°C / +45°C
Mounting Type	Surface mounted / Suspended
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor / Outdoor
Body Material	PC
Cover Material	PC
Available accessories	N/A

Technical Specifications

Wattage	24/34/40
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>25,000
Lifetime Hours	L70 B50 72,000hrs L80 B20 50,000hrs
Energy Rating	B
Inrush Current	26A/170us

Photometric Specifications

Lumens	24W - 4080 / 4320 / 4320lm 34W - 5780 / 6120 / 6120lm 40W - 6800 / 7200 / 7200lm
Efficiency	Up to 180lm/W
Colour Temperature	3000 / 4000 / 6500K
Light Colour Definition	Switchable White
Beam Angle	120°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640156046
Product Weight	1300g
Product Dimensions (ODxH / LxWxH)	1200 x 85 x 80mm
Boxed Product Weight	1450g
Boxed Product Dimensions (LxWxH)	1210 x 85 x 83mm
Outer Carton Boxed Product Quantity	9 pcs
Outer Carton Dimensions (LxWxH)	1225 x 269 x 265mm

