




Hydro-Link Eco™

HYDRO-LINK ECO™ IP66 LINKABLE 45W 1500MM LED ANTI-CORROSIVE 4000K

- Corrosion-resistant eco linear batten IP66 rated with opal diffuser for even and uniform light distribution offers best value for money.
- IP66 rated cable glands on both ends with 3pol terminal block enable quick and simple through-wiring and product installation.
- IK08 polycarbonate diffuser and housing vandal-proof.
- Résistant aux UV et conçu pour les environnements extérieurs non abrités avec températures ambiantes de -20°C à +45°C.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
AC159610	Non-Dimmable	4000K	46W	6000lm	130lm/W	80

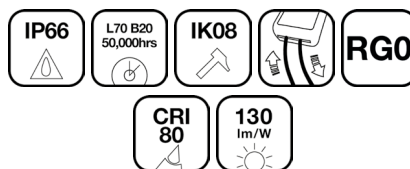

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

Hydro-Link Eco™

HYDRO-LINK ECO™ IP66 LINKABLE 45W 1500MM LED ANTI-CORROSIVE 4000K

Specifications and Benefits

Ingress Protection Rating	IP66
IK Rating	IK08
Operating Temperature Range	-20°C / +40°C
Mounting Type	Surface mounted
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Plastic
Cover Material	PC
Available accessories	N/A

Technical Specifications

Wattage	46W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Lifetime Hours	L70 B50 50,000hrs L80 B20 35,000hrs
Insulation Coverable	N/A

Photometric Specifications

Lumens	6000lm
Efficiency	Up to 130lm/W
Colour Temperature	4000K
Light Colour Definition	Neutral White
Beam Angle	120°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640159610
Product Weight	720g
Product Dimensions (ODxH / LxWxH)	1485 x 65.2 x 55.2mm
Boxed Product Weight	1080g
Boxed Product Dimensions (LxWxH)	1520 x 70 x 60mm
Outer Carton Boxed Product Quantity	12 pcs
Outer Carton Dimensions (LxWxH)	1610 x 300 x 200mm

