


LinearPac CSR™

LINEARPAC™ G3 1200MM 30W IP66 LED ANTI-CORROSIVE 4000K THROUGH WIRING

- Modular High-Efficiency IP66 Corrosion-Resistant Linear Batten with modular product design for tool-free maintenance of the LED PCB and driver at end of lifetime, as well as plug-and-play extension with microwave sensor, microwave sensor with dimming/corridor function, emergency kit with self-test or DALI dimming drive
- IP66 rated cable glands on both ends and rear entry enable quick through-wiring via terminal blocks. IK08 polycarbonate diffuser and housing are vandal-proof with 850° glow-wire resistance. Suitable for ambient temperatures from -20 °C to +45 °C.
- Quick-release hinged gear tray with durable 304 stainless steel anti-theft clips ensures fast installation and simplified maintenance. Once the base is secured, the diffuser simply clips into place. Cable gland, mounting/suspension bracket and anti-theft screws included.
- Wide product range provides maximum flexibility and best-in-class efficiency, making it the ideal retrofit solution for single and twin corrosion-resistant T8 fluorescent fittings.
- Wide range offers ultimate flexibility at best efficiency for price in every application and perfect retrofit solution for single and twin corrosion resistant T8 fluorescent fittings.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
AC161071	Non-Dimmable	4000K	30W	5400lm	180lm/W	80

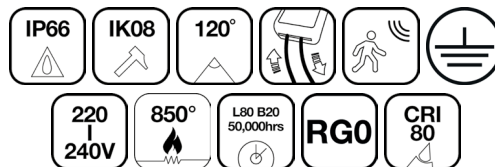

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

LinearPac CSR™

LINEARPAC™ G3 1200MM 30W IP66 LED ANTI-CORROSIVE 4000K THROUGH WIRING

Specifications and Benefits

Ingress Protection Rating	IP66
IK Rating	IK08
Operating Temperature Range	-20°C / +45°C
Mounting Type	Surface mounted / Suspended
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor / Outdoor
Body Material	PC
Cover Material	PC
Available accessories	N/A

Technical Specifications

Wattage	30W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>25,000
Lifetime Hours	L70 B50 72,000hrs L80 B20 50,000hrs
Energy Rating	B
Inrush Current	26A/170µs

Photometric Specifications

Lumens	5400lm
Efficiency	Up to 180lm/W
Colour Temperature	4000K
Light Colour Definition	Neutral White
SDCM	<3
Beam Angle	120°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640161071
Product Weight	1300g
Product Dimensions (ODxH / LxWxH)	1200 x 85 x 80mm
Boxed Product Weight	1450g
Boxed Product Dimensions (LxWxH)	1210 x 85 x 83mm
Outer Carton Boxed Product Quantity	9 pcs
Outer Carton Dimensions (LxWxH)	1225 x 269 x 265mm

