




## TubularWS™

### TUBULARWS™ IP69K IK10 1200MM 24/36W WATTAGE SWITCHABLE LINKEABLE ANTI CORROSIVE

- High-Efficiency Wattage Selectable (154 lm/W) Corrosion-Resistant Linear Batten equipped with an opal UV-resistant polycarbonate diffuser, IK10 rated for maximum impact resistance.
- IP69K rated and designed for environments requiring heavy wash-down cleaning.
- Supplied with 316 stainless steel mounting brackets for simplified surface installation.
- Integrated flicker-free non-dimmable driver with IP69K cable glands on both ends and 3-pole push terminals for safe, rapid through-wiring.
- UV resistant and suitable for installations in unprotected outdoor areas with ambient temperatures from -20°C to +45°C.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
<b>AC162627</b>	Non-Dimmable	4000K	24 / 36W	3696-5544lm	Up to 154lm/W	80

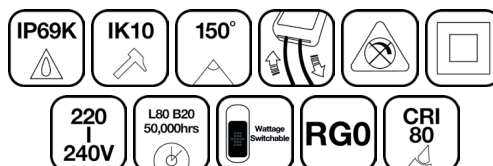

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

## TubularWS™

### TUBULARWS™ IP69K IK10 1200MM 24/36W WATTAGE SWITCHABLE LINKEABLE ANTI CORROSIVE

#### Specifications and Benefits

Ingress Protection Rating	IP69k
IK Rating	IK10
Operating Temperature Range	-20°C / +45°C
Mounting Type	Surface mounted / Suspended
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor / Outdoor
Body Material	PC
Cover Material	PC
Available accessories	N/A

#### Technical Specifications

Wattage	24/36
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>25,000
Lifetime Hours	L70 B50 60,000hrs L80 B20 50,000hrs
Energy Rating	D
Insulation Coverable	NO
Inrush Current	11A

#### Photometric Specifications

Lumens	24W 3800lm 36W 5550lm
Efficiency	Up to 154lm/W
Colour Temperature	4000K
Light Colour Definition	Neutral White
Beam Angle	150°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

#### Logistic Details

EAN / Barcode	3609640162627
Product Weight	965g
Product Dimensions (ODxH / LxWxH)	Ø78 x mm
Boxed Product Weight	1165g
Boxed Product Dimensions (LxWxH)	1280 x 85 x 85mm
Outer Carton Boxed Product Quantity	6 pcs
Outer Carton Dimensions (LxWxH)	1305 x 185 x 270mm

