




HerculesCWS

HERCULESCWS™ IP65 DIE CAST LED BULKHEAD 3CCT 3000K/3500/4000K MICROWAVE SENSOR

- Colour & Wattage Switchable IP65 Die-Cast Aluminium Bulkhead with opal polycarbonate IK10 diffuser for even and uniform light distribution.
- 4 Wattage and 3 Colour Selections available for ultimate flexibility in every application.
- IP65 rated side and rear entry access wiring compartment enable quick and simple through-wiring and product installation.
- IK10 polycarbonate diffuser and Die Cast aluminium housing vandal-proof.
- Microwave Sensor version with adjustable daylight harvesting. Function (25lux/off), 108° detection range up to 4 meter and hold time configurations from 5 seconds to 10 minutes available.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
BH150839	Microwave Sensor	3000 / 3500 / 4000K	13 / 15.5 / 17.5 / 18.5W	1418-2160lm	Up to 120lm/W	80

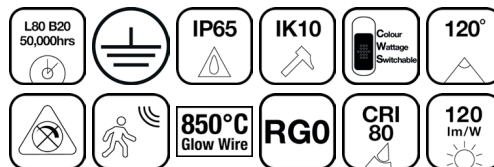

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

HerculesCWS™

HERCULESCWS™ IP65 DIE CAST LED BULKHEAD 3CCT 3000K/3500/4000K MICROWAVE SENSOR

Specifications and Benefits

Ingress Protection Rating	IP65
IK Rating	IK10
Operating Temperature Range	-25°C / +40°C
Mounting Type	Surface mounted / Wall mounted
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor / Outdoor
Body Material	Aluminium
Cover Material	PC
Finishing	Black

Available accessories: N/A

Technical Specifications

Wattage	13/15,5/17,5/18,5
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0,9
Switching Cycles	>10,000
Lifetime Hours	L70 B50 60,000hrs L80 B20 50,000hrs
Energy Rating	D
Insulation Coverable	N/A

Photometric Specifications

Lumens	13W - 1418 / 1500 / 1418lm 15.5W - 1575 / 1800 / 1575lm 17.5W - 1785 / 2040 / 1785lm 18.5W - 1890 / 2160 / 1890lm
Efficiency	Up to 120lm/W
Colour Temperature	3000 / 3500 / 4000K
Light Colour Definition	Switchable White
Beam Angle	108°
CRI	>80
Dimming Type	Microwave Sensor
Distribution	Direct

Logistic Details

EAN / Barcode	3609640150839
Product Weight	1400g
Product Dimensions (ODxH / LxWxH)	Ø300 x 90mm
Boxed Product Weight	1700g
Boxed Product Dimensions (LxWxH)	304 x 304 x 96mm
Outer Carton Boxed Product Quantity	10 pcs
Outer Carton Dimensions (LxWxH)	625 x 495 x 325mm

