




Asimes™

ASIMES™ 20W/25W IP65 LED BULKHEAD WHITE 3CCT ASYMMETRICAL

- Colour and wattage Switchable IP65 Asymmetrical Bulkhead with opal polycarbonate IK10 diffuser for even and uniform light distribution. Perfect for demanding wall and ceiling installations.
- Precise asymmetrical light distribution directs light exactly where it is needed, reducing upward spill and glare while increasing efficiency. It ensures the required light levels for pathways, facades and outdoor areas are achieved.
- Durable design with IP65 rated rear entry wiring compartment for quick and simple trough-wiring and installation.
- Flexible configuration with 3 colour and 2 wattage switchable options for maximum adaptability in every application.
- UV resistant and suitable for installations in unprotected outdoor areas with ambient temperatures from -25°C to +45°C.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
BH161415	Non-Dimmable	3000 / 3500 / 4000K	20 / 25W	2200-3000lm	Up to 120lm/W	80

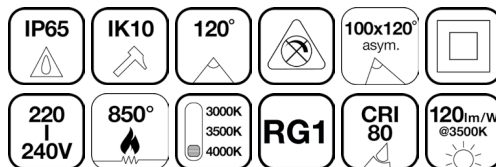

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

Asimes™

ASIMES™ 20W/25W IP65 LED BULKHEAD WHITE 3CCT ASYMMETRICAL

Specifications and Benefits

Ingress Protection Rating	IP65
IK Rating	IK10
Operating Temperature Range	-25°C / +45°C
Mounting Type	Surface mounted / Wall mounted
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor / Outdoor
Body Material	Plastic
Cover Material	PC
Available accessories	N/A

Technical Specifications

Wattage	20/25
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.8
Switching Cycles	>25,000
Lifetime Hours	L70 B50 60,000hrs L80 B20 50,000hrs
Inrush Current	5A

Photometric Specifications

Lumens	20W - 2200 / 2380 / 2200lm 25W - 2700 / 3000 / 2700lm
Efficiency	Up to 120lm/W
Colour Temperature	3000 / 3500 / 4000K
Light Colour Definition	Switchable White
Beam Angle	120°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640161415
Product Weight	820g
Product Dimensions (ODxH / LxWxH)	Ø355 x 115mm
Boxed Product Weight	900g
Boxed Product Dimensions (LxWxH)	357 x 357 x 117mm
Outer Carton Boxed Product Quantity	10 pcs
Outer Carton Dimensions (LxWxH)	735 x 605 x 375mm