




CircularCWS™

CIRCULARCWS™ 34/50W Ø1200 ROUND SUSPENSION COLOUR SWITCHABLE 3000K/3500K/4000K BLACK DALI DIMMABLE

- Colour & Wattage Switchable Circular Decorative Pendant Light with sleek, ultra-thin aluminium housing perfectly suited for contemporary interiors such as offices, receptions, and living spaces.
- Robust, minimalist design with high-quality housing and integrated opal diffuser ensures even, uniform, and comfortable light distribution with minimal glare (UGR <22).
- Tool-free height adjustment with flexible steel suspension cables allows quick and easy modification of hanging height during installation.
- Integrated wattage-switchable DALI-dimmable driver is concealed within the ceiling canopy for a clean appearance and fast mounting.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
CL160906	DALI-2 / PUSH DIM	3000 / 3500 / 4000K	34 / 38 / 44 / 55W	4400-4700lm	Up to 85lm/W	80

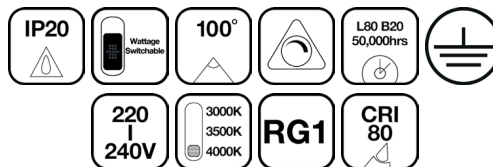

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

CircularCWS™

CIRCULARCWS™ 34/50W Ø1200 ROUND SUSPENSION COLOUR SWITCHABLE 3000K/3500K/4000K BLACK DALI DIMMABLE

Specifications and Benefits

Ingress Protection Rating	IP20
IK Rating	IK01
Operating Temperature Range	-20°C / +45°C
Mounting Type	Suspended
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor
Body Material	Aluminium, Steel
Cover Material	PMMA
Available accessories	N/A

Technical Specifications

Wattage	34/38/44/55
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.95
Switching Cycles	>25,000
Lifetime Hours	L70 B50 60,000hrs L80 B20 50,000hrs
Inrush Current	65A

Photometric Specifications

Lumens	34W - / 2890 / lm
	38W - / 3230 / lm
	44W - / 3740 / lm
	55W - / 4700 / lm
Efficiency	Up to 85lm/W
Colour Temperature	3000 / 3500 / 4000K
Light Colour Definition	Switchable White
SDCM	<3
Beam Angle	100°
CRI	>80
Dimming Type	DALI-2 / PUSH DIM
Distribution	Direct

Logistic Details

EAN / Barcode	3609640160906
Product Weight	3300g
Product Dimensions (ODxH / LxWxH)	Ø1200 x 25mm
Boxed Product Weight	8100g
Outer Carton Boxed Product Quantity	0 pcs
Outer Carton Dimensions (LxWxH)	0 x 0 x 0mm

