


## LinoraCS™

### LINORA CS™ COLOUR SWITCHABLE LINEAR LIGHT REFLECTOR CUP + LENSE 1200MM WHITE

- Modular, Colour Switchable and Seamlessly Connectable Linear luminaire with superior finish, robust extruded aluminium body, and a high-efficiency, UGR16 low-glare reflector cup and lens optics.
- Tool-free rapid connection system with integrated plug-and-play electrical connection allows for a fully modular, seamless, and flexible linear installation — suitable for both suspended and surface-mounted applications. Mounting accessories included.
- Wide range of illuminated connectors enables creative configurations with simple splicing into various shapes.
- Optional magnetic plug-and-play up-light bar provides a tool-free transformation into a 30% up-light / 70% down-light solution, enhancing ambient lighting and well-being in any environment.

Code	Version	Colour	Watts	Lumens	lm/W	UGR	CRI
<b>CL163822</b>	Non-Dimmable	3000 / 3500 / 4000K	24W	3840lm	160lm/W	16	80

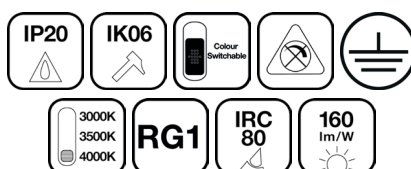

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

# LinoraCS™

## LINORA CS™ COLOUR SWITCHABLE LINEAR LIGHT REFLECTOR CUP + LENSE 1200MM WHITE

### Specifications and Benefits

Ingress Protection Rating	IP20
IK Rating	IK06
Operating Temperature Range	-20°C / +40°C
Mounting Type	Surface mounted / Suspended
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor
Body Material	Aluminium
Cover Material	PC
Available accessories	N/A

### Technical Specifications

Wattage	24W
Nominal Voltage	200-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>25,000
Lifetime Hours	L70 B50 110,000hrs L80 B20 72,000hrs
Insulation Coverable	NO
Inrush Current	10.5A/248us

### Photometric Specifications

Lumens	3360 / 3840 / 3840lm
Efficiency	Up to 160lm/W
Colour Temperature	3000 / 3500 / 4000K
Light Colour Definition	Switchable White
SDCM	<3
Beam Angle	75°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

### Logistic Details

EAN / Barcode	3609640163822
Product Weight	1830g
Product Dimensions (ODxH / LxWxH)	1147 x 50 x 72.8mm
Boxed Product Weight	2000g
Boxed Product Dimensions (LxWxH)	1250 x 61 x 87mm
Outer Carton Boxed Product Quantity	9 pcs
Outer Carton Dimensions (LxWxH)	1270 x 210 x 285mm

