




PrincetonCSR

LINEAR PC CWS 1500X150X50MM 4WS 3CCT 115° IP44 IK10 NONUGR WHITE

- Colour & Wattage Switchable Modular Low-Glare Surface-Mount Linear as ideal energy-saving solution to replace traditional fluorescent luminaires.
- Robust housing with micro-prismatic diffuser delivers uniform, low-glare light distribution (UGR <19) for enhanced visual comfort and improved productivity.
- Modular design allows tool-free maintenance of the LED PCB and driver at end of life, as well as plug-and-play extensions including microwave or PIR sensors with dimming function, emergency kits with self-test, or DALI-dimmable drivers.
- Flexible installation options: suitable for surface mounting, suspension, or wall mounting. (See product options for details.)

Code	Colour	Watts	Lumens	lm/W	UGR	CRI
CL164201	3000 / 4000K	29 / 36 / 41 / 50W	3780-6600lm	Up to 140lm/W	19	80

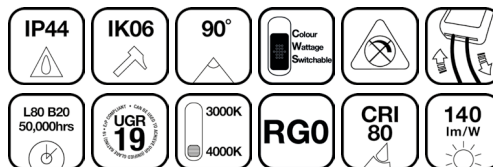

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

PrincetonCSR

LINEAR PC CWS 1500X150X50MM 4WS 3CCT 115° IP44 IK10 NONUGR WHITE

Specifications and Benefits

Ingress Protection Rating	IP44
IK Rating	IK06
Operating Temperature Range	-15°C / +40°C
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class I
Available accessories	N/A

Photometric Specifications

Lumens	29
	36
	41
	50
Efficiency	Up to 140lm/W
Colour Temperature	3000K
SDCM	<3
Beam Angle	115°
CRI	>80

Technical Specifications

Wattage	27/33/40/48
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Lifetime Hours	L70 B50 60,000hrs L80 B20 50,000hrs

Logistic Details

EAN / Barcode	3609640164201
Product Dimensions (ODxH / LxWxH)	1500 x 180 x 50mm
Boxed Product Weight	0g
Outer Carton Boxed Product Quantity	0 pcs
Outer Carton Dimensions (LxWxH)	0 x 0 x 0mm

