




# Klay™

## KLAY™ 10W MULTI-DIRECTIONAL IP65 WALL LIGHT BLACK 4000K

- High quality die-cast aluminium multi-directional IP65 decorative wall lights. Single Type product.
- Direct and Indirect lighting through adjustable reflectors. Simple adjustments can be made from the top or bottom of the product.
- Supplied with integrated non dimmable led driver for ease of installation.
- Aluminium die-cast finish in Black.

| Code            | Version      | Colour | Watts | Lumens | lm/W   | CRI |
|-----------------|--------------|--------|-------|--------|--------|-----|
| <b>DC155148</b> | Non-Dimmable | 4000K  | 10W   | 860lm  | 86lm/W | 80  |

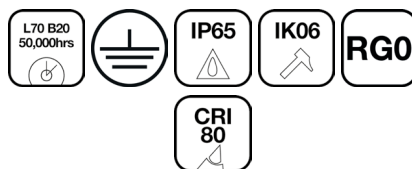

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

# Klay™

## KLAY™ 10W MULTI-DIRECTIONAL IP65 WALL LIGHT BLACK 4000K

### Specifications and Benefits

|                             |                      |
|-----------------------------|----------------------|
| Ingress Protection Rating   | IP65                 |
| IK Rating                   | IK06                 |
| Operating Temperature Range | -20°C / +45°C        |
| Cutout Dimension            | min: N/Amm - max: mm |
| Certification               | CE                   |
| Protection Class            | Class I              |
| Installation Location       | Indoor / Outdoor     |
| Body Material               | Steel                |
| Cover Material              | PC                   |
| Finishing                   | Black                |
| Available accessories       | N/A                  |

### Technical Specifications

|                      |  |
|----------------------|--|
| Wattage              | 10W                                    |
| Nominal Voltage      | 200-240Vac                             |
| Frequency            | 50/60Hz                                |
| Power Factor         | >0.9                                   |
| Switching Cycles     | >100,000                               |
| Lifetime Hours       | L70 B50 50,000hrs<br>L80 B20 35,000hrs |
| Insulation Coverable | N/A                                    |
| Inrush Current       | 6A                                     |

### Photometric Specifications

|                         |                   |
|-------------------------|-------------------|
| Lumens                  | 860lm             |
| Efficiency              | Up to 86lm/W      |
| Colour Temperature      | 4000K             |
| Light Colour Definition | Cool White        |
| Beam Angle              | 15/30/45/60°      |
| CRI                     | >80               |
| Dimming Type            | Non-Dimmable      |
| Distribution            | Direct / Indirect |

### Logistic Details

|                                     |                   |
|-------------------------------------|-------------------|
| EAN / Barcode                       | 3609640155148     |
| Product Weight                      | 590g              |
| Product Dimensions (ODxH / LxWxH)   | 120 x 100 x 95mm  |
| Boxed Product Weight                | 630g              |
| Boxed Product Dimensions (LxWxH)    | 120 x 140 x 120mm |
| Outer Carton Boxed Product Quantity | 24 pcs            |
| Outer Carton Dimensions (LxWxH)     | 385 x 500 x 295mm |

