




Walle™ CS

WALLE™CS 6W IP65 CS FIXED UP/DOWN LED WALL LIGHT WHITE 2700K/3000K/4000K

- Colour Switchable Die-Cast Aluminium Decorative Wall Light suitable for both indoor and outdoor installations.
- Durable IP65 rated, impact resistant and salt-spray tested housing for long service life.
- Superior optical convex lens design ensures precise, direct/indirect symmetrical light distribution. Available as direct or direct/indirect version.
- Integrated TRIAC dimmable LED driver with junction box for simplified installation.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
DC155261	Non-Dimmable	2700 / 3300 / 4000K	6W	530-650lm	Up to 109lm/W	80

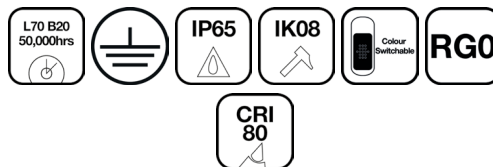

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

Walle™ CS

WALLE™CS 6W IP65 CS FIXED UP/DOWN LED WALL LIGHT WHITE 2700K/3000K/4000K

Specifications and Benefits

Ingress Protection Rating	IP65
IK Rating	IK08
Operating Temperature Range	-20°C / +45°C
Mounting Type	Surface mounted / Wall mounted
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor / Outdoor
Body Material	Steel
Cover Material	PC
Finishing	White
Available accessories	N/A

Technical Specifications

Wattage	6W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.8
Switching Cycles	>100,000
Lifetime Hours	L70 B50 50,000hrs L80 B20 35,000hrs
Insulation Coverable	N/A
Inrush Current	2A

Photometric Specifications

Lumens	530 / 600 / 650lm
Efficiency	Up to 109lm/W
Colour Temperature	2700 / 3300 / 4000K
Light Colour Definition	Tuneable White
Beam Angle	8°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct / Indirect

Logistic Details

EAN / Barcode	3609640155261
Product Weight	470g
Product Dimensions (ODxH / LxWxH)	135 x 31 x 90mm
Boxed Product Weight	530g
Boxed Product Dimensions (LxWxH)	60 x 160 x 125mm
Outer Carton Boxed Product Quantity	18 pcs
Outer Carton Dimensions (LxWxH)	200 x 390 x 335mm

