




MIRACS™

10W COLOUR SWITCHABLE COB WALL LIGHT BLACK

- Colour Switchable Die-Cast Aluminium Decorative Wall Light suitable for both indoor and outdoor installations.
- Durable IP65 rated, impact resistant and salt-spray tested housing for long service life.
- Superior optical convex lens design ensures precise, direct/indirect symmetrical light distribution. Available as direct or direct/indirect version.
- Integrated TRIAC dimmable LED driver with junction box for simplified installation.

| Code | Version | Colour | Watts | Lumens | lm/W | CRI |
|-----------------|--------------|---------------------|-------|-------------|--------------|-----|
| DC163051 | Non-Dimmable | 3000 / 4000 / 5000K | 10W | 1120-1430lm | Up to 87lm/W | 90 |

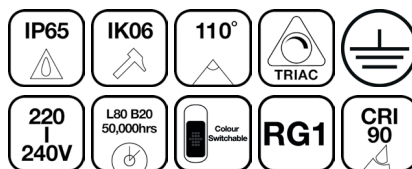

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

MIRACS™

10W COLOUR SWITCHABLE COB WALL LIGHT BLACK

Specifications and Benefits

| | |
|-----------------------------|----------------------|
| Ingress Protection Rating | IP65 |
| IK Rating | IK06 |
| Operating Temperature Range | -20°C / +45°C |
| Mounting Type | Wall surface |
| Cutout Dimension | min: N/Amm - max: mm |
| Certification | CE |
| Protection Class | Class I |
| Installation Location | Indoor / Outdoor |
| Body Material | Aluminium |
| Cover Material | Glass |
| Available accessories | N/A |

Technical Specifications

| | |
|----------------------|--|
| Wattage | 10W |
| Nominal Voltage | 220-240Vac |
| Frequency | 50/60Hz |
| Power Factor | >0.9 |
| Switching Cycles | >100,000 |
| Lifetime Hours | L70 B50 60,000hrs L80 B20 50,000hrs |
| Energy Rating | F |
| Insulation Coverable | NO |
| Inrush Current | 13.3A/2.08uS |

Photometric Specifications

| | |
|-------------------------|---------------------|
| Lumens | / 870 / lm |
| Efficiency | Up to 87lm/W |
| Colour Temperature | 3000 / 4000 / 5000K |
| Light Colour Definition | Switchable White |
| Beam Angle | 110° |
| CRI | >90 |
| Dimming Type | Non-Dimmable |
| Distribution | Direct |

Logistic Details

| | |
|-------------------------------------|-------------------|
| EAN / Barcode | 3609640163051 |
| Product Weight | 900g |
| Product Dimensions (ODxH / LxWxH) | Ø76 x 185mm |
| Boxed Product Weight | 1060g |
| Boxed Product Dimensions (LxWxH) | 220 x 95 x 115mm |
| Outer Carton Boxed Product Quantity | 12 pcs |
| Outer Carton Dimensions (LxWxH) | 460 x 305 x 255mm |

