


WIZARD™

IP65 WALL LIGHT RECESSED MOUNTED D135XH78 5W 3000K 170LM 60°

- Round luminaire in black, UV-resistant cast aluminium for indoor and outdoor use (IP65), with salt spray treatment.
- For use as marker lighting in stairwells or walls, and for indirect, glare-free lighting .
- Available as a surface-mounted or recessed version.
- Integrated driver and plug-in terminal block.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
DC163075	Non-Dimmable	3000K	5W	170lm	34lm/W	80

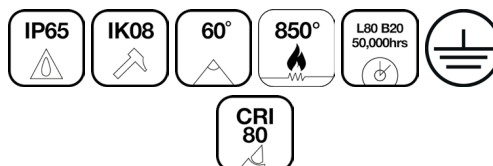

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

WIZARD™

IP65 WALL LIGHT RECESSED MOUNTED D135XH78 5W 3000K 170LM 60°

Specifications and Benefits

Ingress Protection Rating	IP65
IK Rating	IK08
Operating Temperature Range	-10°C / +45°C
Mounting Type	Recessed
Cutout Dimension	min: 130mm - max: 130mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor / Outdoor
Body Material	Aluminium
Cover Material	Glass
Available accessories	N/A

Technical Specifications

Wattage	5W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>100,000
Lifetime Hours	L70 B50 60,000hrs L80 B20 50,000hrs
Energy Rating	E
Inrush Current	5.28A@28.8uS

Photometric Specifications

Lumens	170lm
Efficiency	Up to 34lm/W
Colour Temperature	3000K
Light Colour Definition	Warm White
Beam Angle	60°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct / Indirect

Logistic Details

EAN / Barcode	3609640163075
Product Weight	375g
Product Dimensions (ODxH / LxWxH)	Ø135 x 78mm
Recess Depth	78mm
Boxed Product Weight	490g
Boxed Product Dimensions (LxWxH)	155 x 98 x 155mm
Outer Carton Boxed Product Quantity	18 pcs
Outer Carton Dimensions (LxWxH)	485 x 315 x 345mm