




Poly-Slim[™]

POLY-SLIM[™] 12W ROUND POLYCARBONATE LOW PROFILE LED DOWNLIGHT 4000K

- Super-slim Polycarbonate edge-lit low profile LED Downlights offer best value for money and are ideal for installations in limited recess space (40mm incl. driver).
- Wide product range covers most common cut-out dimensions of traditional light sources and delivers enhanced energy savings.
- Opal polycarbonate diffusor for even light distribution.
- Supplied with remote non-dimmable constant current driver and 350mm cable for ease of installation.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
DL149567	Non-Dimmable	4000K	12W	1200lm	100lm/W	80

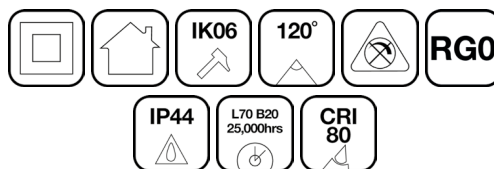

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

Poly-Slim[™]

POLY-SLIM[™] 12W ROUND POLYCARBONATE LOW PROFILE LED DOWNLIGHT 4000K

Specifications and Benefits

Ingress Protection Rating	IP44
IK Rating	IK06
Operating Temperature Range	-10°C / +35°C
Mounting Type	Recessed
Cutout Dimension	min: 150mm - max: mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Polymer
Cover Material	PMMA
Finishing	White
Available accessories	N/A

Technical Specifications

Wattage	12W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.5
Switching Cycles	>12,500
Lifetime Hours	L70 B20 25,000hrs L80 B20 15,000hrs
Energy Rating	F
Insulation Coverable	NO
Inrush Current	5A

Photometric Specifications

Lumens	1200lm
Efficiency	Up to 100lm/W
Colour Temperature	4000K
Light Colour Definition	Neutral White
Beam Angle	120°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640149567
Product Weight	193g
Product Dimensions (ODxH / LxWxH)	Ø170 x 21mm
Recess Depth	19mm
Boxed Product Weight	243g
Boxed Product Dimensions (LxWxH)	175 x 175 x 40mm
Outer Carton Boxed Product Quantity	20 pcs
Outer Carton Dimensions (LxWxH)	210 x 450 x 375mm

