




## Uni-Fit Baffle™

### UNI-FIT BAFFLECS™ IP44 COLOUR SWITCHABLE 15W INTEGRATED Ø125 BAFFLED LED DOWNLIGHT

- Colour Switchable Compact Integrated IP44 low Glare Commercial LED Downlight range are a perfect value for money solution for new commercial applications or upgrading from compact fluorescent fittings in existing environments.
- Low glare baffled aluminium specular reflector provides great glare control and even light distribution.
- Colour Switchable between 3000/4000K for an on-site adaptation.
- Supplied with slight recessed white bezel frame.
- Integrated non-dimmable driver and pre-wired with 500mm cable for ease of installation.

Code	Version	Colour	Watts	Lumens	lm/W	UGR	CRI
<b>DL150501</b>	Non-Dimmable	3000 / 4000K	15W	1425-1500lm	Up to 100lm/W	19	80

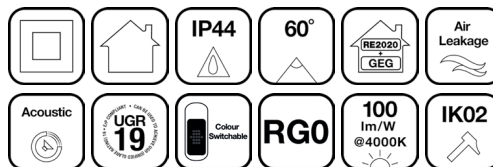

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

## Uni-Fit Baffle™

### UNI-FIT BAFFLECS™ IP44 COLOUR SWITCHABLE 15W INTEGRATED Ø125 BAFFLED LED DOWNLIGHT

#### Specifications and Benefits

Ingress Protection Rating	IP44
IK Rating	IK02
Operating Temperature Range	-20°C / +40°C
Mounting Type	Recessed
Cutout Dimension	min: 125mm - max: 125mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Aluminium, PC
Cover Material	PC
Finishing	White
Available accessories	N/A

#### Technical Specifications

Wattage	15W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>12,500
Lifetime Hours	L70 B20 25,000hrs L80 B20 15,000hrs
Energy Rating	F
Insulation Coverable	NO
Inrush Current	2A

#### Photometric Specifications

Efficiency	Up to 100lm/W
Colour Temperature	3000K
Light Colour Definition	Switchable White
SDCM	<3
Beam Angle	60°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

#### Logistic Details

EAN / Barcode	3609640150501
Product Weight	240g
Product Dimensions (ODxH / LxWxH)	Ø150 x 81mm
Recess Depth	81mm
Boxed Product Weight	300g
Boxed Product Dimensions (LxWxH)	90 x 155 x 155mm
Outer Carton Boxed Product Quantity	20 pcs
Outer Carton Dimensions (LxWxH)	470 x 330 x 330mm

