


# ELumi<sup>™</sup>

## ELUMI<sup>™</sup> IP54 25W Ø200 LED DOWNLIGHT 4000K

- Compact integrated IP54 Aluminium Commercial LED Downlight range are a perfect solution for new commercial applications or upgrading from compact fluorescent fittings in existing environments.
- Wide product offering covers most common cut-out dimensions of traditional light sources and delivers enhanced energy savings.
- Opal diffuser for even light distribution.
- Supplied with remote non-dimmable constant current driver. Dali Driver option available as accessory.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
<b>DL151058</b>	Non-Dimmable	4000K	25W	3045lm	122lm/W	80

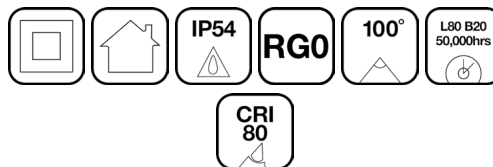

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

# ELumi™

## ELUMI™ IP54 25W Ø200 LED DOWNLIGHT 4000K

### Specifications and Benefits

Ingress Protection Rating	IP54
Operating Temperature Range	-20°C / +40°C
Mounting Type	Recessed
Positional Adjustment	Fixed
Cutout Dimension	min: 200mm - max: mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Aluminium
Cover Material	PC
Finishing	White
Available accessories	· DR159412 - DALI Driver · DR159412 - DALI Driver

### Technical Specifications

Wattage	25W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>100,000
Lifetime Hours	L70 B50 60,000hrs L80 B20 50,000hrs
Energy Rating	D
Insulation Coverable	NO
Inrush Current	5A

### Photometric Specifications

Lumens	3045lm
Efficiency	Up to 122lm/W
Colour Temperature	4000K
Light Colour Definition	Neutral White
SDCM	<6
Beam Angle	100°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

### Logistic Details

EAN / Barcode	3609640151058
Product Weight	780g
Product Dimensions (ODxH / LxWxH)	Ø228 x 53mm
Recess Depth	53mm
Boxed Product Weight	970g
Boxed Product Dimensions (LxWxH)	260 x 75 x 250mm
Outer Carton Boxed Product Quantity	10 pcs
Outer Carton Dimensions (LxWxH)	515 x 405 x 270mm

