


## GU10ALD™

### GU10ALD™ PRO GU10 ADJUSTABLE LOCK RING DOWNLIGHT ALUMINIUM SATIN NICKEL

- High quality Aluminium GU10 Downlight with Lock Frontring, GU10 Socket and 3pol Terminalblock.
- GU10 lampholder included and pre-wired with BJB Terminal box for ease of installation and tool-free cross wiring. Lamp not included (Max 50W).
- Extended spring fixing posts allow installation in double thickness plasterboard ceilings.
- Compatible with GU10 Ice Lamp and ClearVu.

Code

**DL151539**

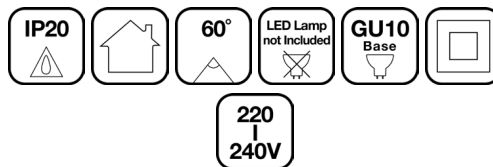

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

## GU10ALD™

### GU10ALD™ PRO GU10 ADJUSTABLE LOCK RING DOWNLIGHT ALUMINIUM SATIN NICKEL

#### Specifications and Benefits

Ingress Protection Rating	IP20
Operating Temperature Range	-10°C / +45°C
Mounting Type	Recessed
Cutout Dimension	min: 80mm - max: mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Aluminium
Available accessories	N/A

#### Technical Specifications

Nominal Voltage	220-240Vac
Frequency	50/60Hz
Lifetime Hours	B50 hrs

#### Photometric Specifications

Beam Angle	60°
------------	-----

#### Logistic Details

EAN / Barcode	3609640151539
Product Weight	164g
Product Dimensions (ODxH / LxWxH)	Ø95 x 39mm
Recess Depth	115mm
Boxed Product Weight	210g
Boxed Product Dimensions (LxWxH)	105 x 110 x 62mm
Outer Carton Boxed Product Quantity	50 pcs
Outer Carton Dimensions (LxWxH)	225 x 575 x 335mm

