




CurveECWS™

CURVEE™ CWS BAFFLE ADJUSTABLE DIMMABLE IP44 LED DOWNLIGHT BLACK

- Colour & Wattage Switchable IP44 Adjustable Low Glare Triac dimmable Aluminium LED Baffle Downlight Black.
- Baffled 30° horizontal adjustable design with the light source recessed to reduce glare. CRI90 for superior colour representation.
- Rapid tool-free installation through loop in / loop out push-fit wiring terminals with strain relief.
- Downlight and driver are insulation coverable without the need of additional accessory or insulation cut-out.

Code	Version	Colour	Watts	Lumens	lm/W	UGR	CRI
DL157159	Dimmable	2700 / 3000 / 4000K	7.5 / 10 / 11.5W	510-810lm	Up to 75lm/W	19	90

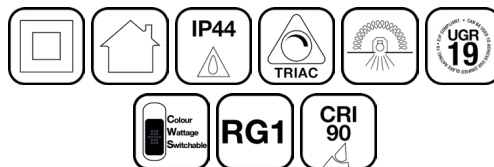

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

CurveECWS™

CURVEE™ CWS BAFFLE ADJUSTABLE DIMMABLE IP44 LED DOWNLIGHT BLACK

Specifications and Benefits

Ingress Protection Rating	IP44
IK Rating	IK02
Operating Temperature Range	-10°C / +45°C
Mounting Type	Recessed
Cutout Dimension	min: 85mm - max: mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Aluminium
Finishing	Black
Available accessories	N/A

Technical Specifications

Wattage	7,5/10/11,5
Nominal Voltage	220-240Vac
Frequency	50Hz
Power Factor	>0.85
Switching Cycles	>100,000
Lifetime Hours	L70 B20 72,000hrs L80 B20 50,000hrs
Energy Rating	F
Insulation Coverable	YES
Inrush Current	2A

Photometric Specifications

Lumens	7.5W - / / 565lm
	10W - / / 705lm
	11.5W - / / 810lm
Efficiency	Up to 75lm/W
Colour Temperature	2700 / 3000 / 4000K
Light Colour Definition	Switchable White
SDCM	<3
Beam Angle	36°
CRI	>90
Dimming Type	Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640157159
Product Weight	340g
Product Dimensions (ODxH / LxWxH)	Ø95 x 74mm
Recess Depth	74mm
Boxed Product Weight	400g
Boxed Product Dimensions (LxWxH)	120 x 120 x 115mm
Outer Carton Boxed Product Quantity	20 pcs
Outer Carton Dimensions (LxWxH)	619 x 254 x 251mm

