




Uni-FitCS™

UNI-FITCS™ IP44 COLOUR SWITCHABLE 23W INTEGRATED Ø170 LED DOWNLIGHT

- Colour Switchable Compact integrated IP44 Polycarbonate LED Downlights offer best value for money.
- Wide product range covers most common cut-out dimensions of traditional light sources and delivers enhanced energy savings.
- Opal polycarbonate diffuser for even light distribution. Supplied with integrated non-dimmable driver and pre-wired with 500mm cable for ease of installation.
- Airtight suitable for new installations or renovations.
- Colour Switchable between 3000K/4000K - ideal for versatile applications.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
DL161163	Non-Dimmable	3000 / 4000K	23W	2500-2700lm	Up to 117lm/W	80

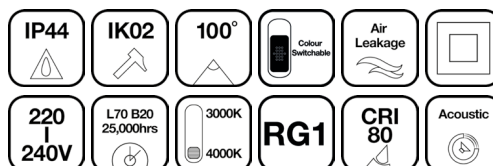

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

Uni-FitCS™

UNI-FITCS™ IP44 COLOUR SWITCHABLE 23W INTEGRATED Ø170 LED DOWNLIGHT

Specifications and Benefits

Ingress Protection Rating	IP44
IK Rating	IK02
Operating Temperature Range	-20°C / +40°C
Mounting Type	Recessed
Cutout Dimension	min: 170mm - max: mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Plastic
Cover Material	PC
Available accessories	N/A

Technical Specifications

Wattage	23W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>15,000
Lifetime Hours	L70 B20 25,000hrs L80 B20 15,000hrs
Energy Rating	E
Inrush Current	2.3

Photometric Specifications

Efficiency	Up to 117lm/W
Colour Temperature	3000K
Light Colour Definition	Switchable White
SDCM	<6
Beam Angle	100°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640161163
Product Weight	358g
Product Dimensions (ODxH / LxWxH)	Ø200 x 60mm
Recess Depth	65mm
Boxed Product Weight	498g
Boxed Product Dimensions (LxWxH)	63 x 205 x 205mm
Outer Carton Boxed Product Quantity	10 pcs
Outer Carton Dimensions (LxWxH)	345 x 435 x 240mm