




Uni-FitCS™

UNI-FITCS™ IP44 COLOUR SWITCHABLE 30W INTEGRATED Ø200 LED DOWNLIGHT

- Colour Switchable Compact integrated IP44 Polycarbonate LED Downlights offer best value for money.
- Wide product range covers most common cut-out dimensions of traditional light sources and delivers enhanced energy savings.
- Opal polycarbonate diffuser for even light distribution. Supplied with integrated non-dimmable driver and pre-wired with 500mm cable for ease of installation.
- Airtight suitable for new installations or renovations.
- Colour Switchable between 3000K/4000K - ideal for versatile applications.

| Code | Version | Colour | Watts | Lumens | lm/W | CRI |
|-----------------|--------------|--------------|-------|-------------|---------------|-----|
| DL161170 | Non-Dimmable | 3000 / 4000K | 30W | 3200-3450lm | Up to 115lm/W | 80 |

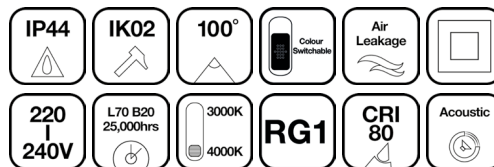

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

Uni-FitCS™

UNI-FITCS™ IP44 COLOUR SWITCHABLE 30W INTEGRATED Ø200 LED DOWNLIGHT

Specifications and Benefits

| | |
|-----------------------------|----------------------|
| Ingress Protection Rating | IP44 |
| IK Rating | IK02 |
| Operating Temperature Range | -20°C / +40°C |
| Mounting Type | Recessed |
| Cutout Dimension | min: 200mm - max: mm |
| Certification | CE |
| Protection Class | Class II |
| Installation Location | Indoor |
| Body Material | Plastic |
| Cover Material | PC |
| Available accessories | N/A |

Technical Specifications

| | |
|------------------|--|
| Wattage | 30W |
| Nominal Voltage | 220-240Vac |
| Frequency | 50/60Hz |
| Power Factor | >0.9 |
| Switching Cycles | >15,000 |
| Lifetime Hours | L70 B20 25,000hrs L80 B20 15,000hrs |
| Energy Rating | F |
| Inrush Current | 2.5 |

Photometric Specifications

| | |
|-------------------------|------------------|
| Efficiency | Up to 115lm/W |
| Colour Temperature | 3000K |
| Light Colour Definition | Switchable White |
| SDCM | <6 |
| Beam Angle | 100° |
| CRI | >80 |
| Dimming Type | Non-Dimmable |
| Distribution | Direct |

Logistic Details

| | |
|-------------------------------------|-------------------|
| EAN / Barcode | 3609640161170 |
| Product Weight | 428g |
| Product Dimensions (ODxH / LxWxH) | Ø235 x 60mm |
| Recess Depth | 65mm |
| Boxed Product Weight | 618g |
| Boxed Product Dimensions (LxWxH) | 63 x 235 x 235mm |
| Outer Carton Boxed Product Quantity | 10 pcs |
| Outer Carton Dimensions (LxWxH) | 345 x 495 x 270mm |