




## PavoCWS PIR

### PAVOCWS PIR™ 10/13/16W NON-DIM SURFACE/RECESSED PIR SENSOR DOWNLIGHT 3CCT 3000/4000/5700K

- Colour & Wattage Switchable PIR Daylight Harvesting LED Downlight designed for maximum energy savings in surface- or recessed-mount retrofit installations. Adjustable cut-out ensures a perfect fit.
- Offers 3 wattage and 3 colour selections for ultimate flexibility and an ideal solution for renovations
- Universal on-size-fits-all bracket with adjustable cut-out (65–205 mm) enables both recessed and surface-mount installations.
- Integrated LED driver allows an ultra-low installation height of just 17 mm.
- Individually programmable PIR daylight harvesting sensor for presence detection, daylight control or corridor function. Settings include detection area, hold time, standby time, daylight threshold and brightness scene control.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
<b>DL162023</b>	Non-Dimmable	3000 / 4000 / 5700K	10 / 13 / 16W	925-1484lm	Up to 100lm/W	80

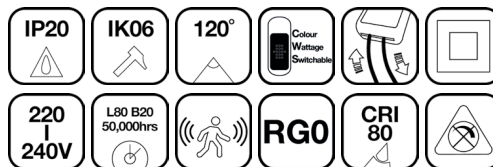

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

## PavoCWS PIR™

### PAVOCWS PIR™ 10/13/16W NON-DIM SURFACE/RECESSED PIR SENSOR DOWNLIGHT 3CCT 3000/4000/5700K

#### Specifications and Benefits

Ingress Protection Rating	IP20
IK Rating	IK06
Operating Temperature Range	0°C / +40°C
Mounting Type	Surface mounted / Semi-recessed
Cutout Dimension	min: 65mm - max: 205mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Aluminium, PC
Cover Material	PS
Available accessories	N/A

#### Technical Specifications

Wattage	10/13/16
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>100,000
Lifetime Hours	L70 B50 60,000hrs L80 B20 50,000hrs
Inrush Current	23.9A/102µs

#### Photometric Specifications

Lumens	10W - 925 / 1000 / 1300lm 13W - 990 / 1250 / 1500lm 16W - 930 / 1500 / 1350lm
Efficiency	Up to 100lm/W
Colour Temperature	3000 / 4000 / 5700K
Light Colour Definition	Switchable White
Beam Angle	120°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

#### Logistic Details

EAN / Barcode	3609640162023
Product Weight	480g
Product Dimensions (ODxH / LxWxH)	Ø235 x 22mm
Recess Depth	20mm
Boxed Product Weight	650g
Boxed Product Dimensions (LxWxH)	245 x 275 x 38mm
Outer Carton Boxed Product Quantity	20 pcs
Outer Carton Dimensions (LxWxH)	260 x 405 x 570mm