


CircleLiteCWS™

CIRCLCWS LITE™ IP64 COLOUR & WATTAGE SWITCHABLE 17W/24W Ø360MM SURFACE MOUNT LED

- Colour & Wattage Selectable IP64 Commercial Surface-Mount Luminaire as the perfect and cost-effective solution for new commercial applications or upgrading compact fluorescent fittings in existing environments
- Rear cable entry into widely open base with integrated push-fit terminal for tool-free, quick and simple through-wiring installation.
- Perfect optical backlit design ensures soft and even light distribution.
- Offers 2 wattage and 3 colour selections for maximum flexibility, making it an ideal retrofit solution for renovations.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
DL162665	Non-Dimmable	3000 / 4000 / 5700K	17 / 24W	2210-3120lm	Up to 130lm/W	80

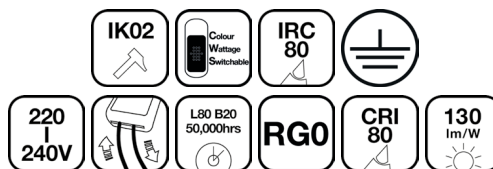

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

CircleLiteCWS™

CIRCLECWS LITE™ IP64 COLOUR & WATTAGE SWITCHABLE 17W/24W Ø360MM SURFACE MOUNT LED

Specifications and Benefits

Ingress Protection Rating	IP64
IK Rating	IK02
Operating Temperature Range	-20°C / +40°C
Mounting Type	Surface mounted / Wall mounted
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor
Body Material	Steel
Cover Material	PMMA
Available accessories	N/A

Technical Specifications

Wattage	17/24
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>20,000
Lifetime Hours	L70 B50 60,000hrs L80 B20 50,000hrs
Energy Rating	E
Inrush Current	10A/200µs

Photometric Specifications

Lumens	17W - 2100 / 2210 / 3120lm 24W - 2960 / 3210 / 3130lm
Efficiency	Up to 130lm/W
Colour Temperature	3000 / 4000 / 5700K
Light Colour Definition	Switchable White
SDCM	<6
Beam Angle	130°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640162665
Product Weight	600g
Product Dimensions (ODxH / LxWxH)	Ø360 x 75mm
Boxed Product Weight	750g
Boxed Product Dimensions (LxWxH)	400 x 400 x 100mm
Outer Carton Boxed Product Quantity	5 pcs
Outer Carton Dimensions (LxWxH)	535 x 402 x 425mm