




VelosCS™

VELOSCS™ 50W LED IP65 COLOUR SWITCHABLE ADJUSTABLE FLOODLIGHT BLACK 3000/3500/4000K

- Colour Switchable IP65 IK07 Weather resistant Residential LED Floodlight designed for unprotected outdoor areas.
- Durable thanks to high pressure aluminum housing and glass cover. Weather resistance and salt spray tested.
- Integrated non dimmable LED driver with 800mm AC cable for reliable and simplified installation.
- Colour switchable between 3000K/3500K/4000K for maximum flexibility in residential environments.
- UV resistant and suitable for installations in unprotected outdoor areas with ambient temperatures from -25°C to +45°C.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
FL153847	Non-Dimmable	3000 / 3500 / 4000K	50W	6000-6250lm	Up to 120lm/W	80

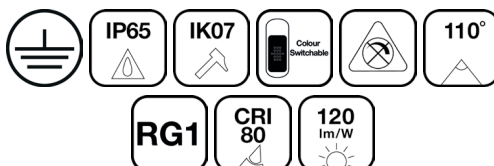

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

VelosCS™

VELOSCS™ 50W LED IP65 COLOUR SWITCHABLE ADJUSTABLE FLOODLIGHT BLACK 3000/3500/4000K

Specifications and Benefits

Ingress Protection Rating	IP65
IK Rating	IK07
Operating Temperature Range	-20°C / +40°C
Mounting Type	Surface mounted / Wall mounted
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor / Outdoor
Body Material	Aluminium
Cover Material	Glass
Finishing	Black

Available accessories N/A

Technical Specifications

Wattage	50W
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>20,000
Lifetime Hours	L70 B50 50,000hrs L80 B20 30,000hrs
Energy Rating	E
Insulation Coverable	NO
Inrush Current	1.25A

Photometric Specifications

Lumens	6000 / 6250 / 6000lm
Efficiency	Up to 120lm/W
Colour Temperature	3000 / 3500 / 4000K
Light Colour Definition	Switchable White
SDCM	<6
Beam Angle	110°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640153847
Product Weight	1190g
Product Dimensions (ODxH / LxWxH)	199 x 60 x 152mm
Boxed Product Weight	1300g
Boxed Product Dimensions (LxWxH)	205 x 158 x 60mm
Outer Carton Boxed Product Quantity	20 pcs
Outer Carton Dimensions (LxWxH)	336 x 425 x 325mm

