




## VelosCS™

### VELOSCS™ 10W LED IP65 COLOUR SWITCHABLE ADJUSTABLE FLOODLIGHT BLACK 3000/3500/4000K

- Colour Switchable IP65 IK07 Weather resistant Residential LED Floodlight designed for unprotected outdoor areas.
- Durable thanks to high pressure aluminum housing and glass cover. Weather resistance and salt spray tested.
- Integrated non dimmable LED driver with 800mm AC cable for reliable and simplified installation.
- Colour switchable between 3000K/3500K/4000K for maximum flexibility in residential environments.
- UV resistant and suitable for installations in unprotected outdoor areas with ambient temperatures from -25°C to +45°C.

| Code            | Version      | Colour              | Watts | Lumens      | lm/W          | CRI |
|-----------------|--------------|---------------------|-------|-------------|---------------|-----|
| <b>FL157418</b> | Non-Dimmable | 3000 / 3500 / 4000K | 10W   | 1200-1250lm | Up to 120lm/W | 80  |

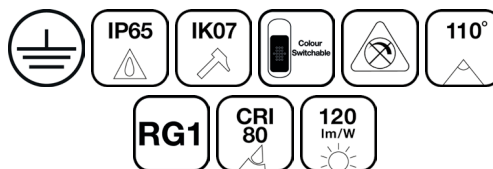

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

## VelosCS™

### VELOSCS™ 10W LED IP65 COLOUR SWITCHABLE ADJUSTABLE FLOODLIGHT BLACK 3000/3500/4000K

#### Specifications and Benefits

|                             |                      |
|-----------------------------|----------------------|
| Ingress Protection Rating   | IP65                 |
| IK Rating                   | IK07                 |
| Operating Temperature Range | -20°C / +40°C        |
| Mounting Type               | Surface mounted      |
| Cutout Dimension            | min: N/Amm - max: mm |
| Certification               | CE                   |
| Protection Class            | Class I              |
| Installation Location       | Indoor / Outdoor     |
| Body Material               | Aluminium            |
| Cover Material              | Glass                |
| Finishing                   | Black                |
| Available accessories       | N/A                  |

#### Technical Specifications

|                      |  |
|----------------------|--|
| Wattage              | 10W                                    |
| Nominal Voltage      | 220-240Vac                             |
| Frequency            | 50/60Hz                                |
| Power Factor         | >0.9                                   |
| Switching Cycles     | >20,000                                |
| Lifetime Hours       | L70 B50 50,000hrs<br>L80 B20 30,000hrs |
| Energy Rating        | E                                      |
| Insulation Coverable | NO                                     |
| Inrush Current       | 0.25                                   |

#### Photometric Specifications

|                         |                      |
|-------------------------|----------------------|
| Lumens                  | 1200 / 1250 / 1200lm |
| Efficiency              | Up to 120lm/W        |
| Colour Temperature      | 3000 / 3500 / 4000K  |
| Light Colour Definition | Switchable White     |
| SDCM                    | <6                   |
| Beam Angle              | 110°                 |
| CRI                     | >80                  |
| Dimming Type            | Non-Dimmable         |
| Distribution            | Direct               |

#### Logistic Details

|                                     |                   |
|-------------------------------------|-------------------|
| EAN / Barcode                       | 3609640157418     |
| Product Weight                      | 221g              |
| Product Dimensions (ODxH / LxWxH)   | 108 x 56 x 77mm   |
| Boxed Product Weight                | 260g              |
| Boxed Product Dimensions (LxWxH)    | 113 x 83 x 65mm   |
| Outer Carton Boxed Product Quantity | 50 pcs            |
| Outer Carton Dimensions (LxWxH)     | 245 x 438 x 348mm |

