




ProximusWS™

PROXIMUSWS™ IP66 IK08 WATTAGE SELECTABLE FLOODLIGHT 120/150/200W 3000K

- Wattage Switchable High-Power IP66 Weather-Resistant LED Floodlight designed for unprotected outdoor areas with superior efficiency of 160 lm/W.
- Available with either a symmetrical 90° lens or a 50x100° asymmetrical light distribution for versatile applications.
- Integrated non-dimmable LED driver with 6 kV surge protection and instant heat dissipation for extended lifespan. Pre-wired with 1000 mm AC cable for safe, simplified installation.
- Ultra-durable high-pressure die-cast aluminium housing with glass cover. Weather-resistant and salt spray tested to C4-M standard.
- UV resistant and suitable for installations in unprotected outdoor areas with ambient temperatures from -40 °C to +50 °C.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
FL157777	Non-Dimmable	3000K	120 / 150 / 200W	19200-32000lm	Up to 160lm/W	80

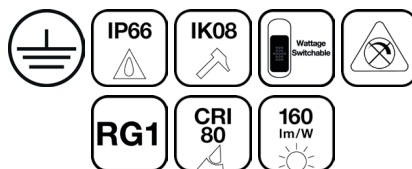

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

ProximusWS™

PROXIMUSWS™ IP66 IK08 WATTAGE SELECTABLE FLOODLIGHT 120/150/200W 3000K

Specifications and Benefits	
Ingress Protection Rating	IP66
IK Rating	IK08
Operating Temperature Range	-40°C / +50°C
Mounting Type	Surface mounted
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor / Outdoor
Body Material	Aluminium
Cover Material	PC
Available accessories	N/A

Technical Specifications	
Wattage	120/150/200
Nominal Voltage	220-277Vac
Frequency	50/60Hz
Switching Cycles	>40,000
Lifetime Hours	L70 B50 100,000hrs L80 B20 72,000hrs
Energy Rating	C
Insulation Coverable	NO

Photometric Specifications	
Lumens	120W 19200lm
	150W 24000lm
	200W 32000lm
Efficiency	Up to 160lm/W
Colour Temperature	3000K
Light Colour Definition	Warm White
SDCM	<6
Beam Angle	90°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details	
EAN / Barcode	3609640157777
Product Weight	4200g
Product Dimensions (ODxH / LxWxH)	390 x 342 x 64mm
Boxed Product Weight	5300g
Boxed Product Dimensions (LxWxH)	110 x 375 x 440mm
Outer Carton Boxed Product Quantity	0 pcs
Outer Carton Dimensions (LxWxH)	0 x 0 x 0mm

