




## PROXI CWS™

### IP66 IK08 WATTAGE SWITCHABLE FLOODLIGHT 20/30/50W 2700/4000/5000K 140LM/W 50X100° ASYMETRIAL LENSE

- Colour & Wattage Switchable IP66 Weather resistant LED Floodlight designed for maximum flexibility in unprotected outdoor areas.
- Offered with either a symmetrical 90° lens or a 50x100° asymmetrical light distribution for versatile applications.
- Integrated non dimmable LED driver with 6kV surge protection and instant head dissipation for best lifespan pre-wired with 1000mm AC cable for reliable and simplified installation.
- Super durable thanks to high pressure die-casted aluminum housing and glass cover. Weather resistance and salt spray tested surface according to C4-M.
- Integrated Plug & Play PIR Sensor base for enhanced energy saving due to presence detection and daylight harvesting.
- UV resistant and suitable for installations in unprotected outdoor areas with ambient temperatures from -40 °C to +50 °C.

Code	Colour	Watts	lm/W	CRI
<b>FL165420</b>	2700 / 4000 / 5000K	20 / 30 / 50W	140lm/W	80

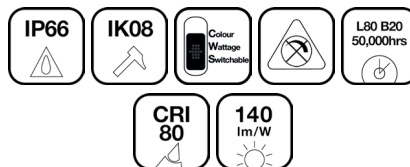

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

## PROXI CWS™

### IP66 IK08 WATTAGE SWITCHABLE FLOODLIGHT 20/30/50W 2700/4000/5000K 140LM/W 50X100° ASYMETRIAL LENSE

#### Specifications and Benefits

Ingress Protection Rating	IP66
IK Rating	IK08
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Available accessories	N/A

#### Photometric Specifications

Lumens	20W - 2800 / 2800 / lm
	30W - 4200 / 4200 / lm
	50W - 7000 / 7000 / lm
Efficiency	Up to 140lm/W
Colour Temperature	2700 / 4000 / 5000K
Beam Angle	50x100°
CRI	>80

#### Technical Specifications

Wattage	20/30/50
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Lifetime Hours	L70 B50 72,000hrs L80 B20 50,000hrs
Energy Rating	D

#### Logistic Details

EAN / Barcode	3609640165420
Product Dimensions (ODxH / LxWxH)	220 x 56 x 182mm
Boxed Product Weight	0g
Outer Carton Boxed Product Quantity	0 pcs
Outer Carton Dimensions (LxWxH)	0 x 0 x 0mm