




G-LitePro™

G-LITE™ PRO GU10 IP65 FIXED ROUND WALKOVER

- IP65 GU10 Recessed Ground Light as the perfect choice for residential outdoor environments.
- Corrosion-resistant body with 304 stainless steel bezel, A4 stainless steel screws and clear tempered glass diffuser (2.500kg load) with salt-spray protection.
- Fourni avec une douille GU10 intégrée et un câble en caoutchouc pré-câblé de 1 m pour une installation sûre et sécurisée dans les applications extérieures.
- Designed for ambient temperatures from $-30\text{ }^{\circ}\text{C}$ to $+45\text{ }^{\circ}\text{C}$.

Code	CRI
OD155308	N/A

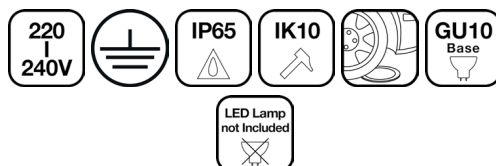

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

G-LitePro[™]

G-LITE[™] PRO GU10 IP65 FIXED ROUND WALKOVER

Specifications and Benefits

Ingress Protection Rating	IP65
IK Rating	IK10
Operating Temperature Range	N/A°C / +N/A°C
Mounting Type	Recessed
Positional Adjustment	Fixed
Cutout Dimension	min: 76mm - max: mm
Certification	CE
Protection Class	Class I
Installation Location	Indoor / Outdoor
Body Material	Stainless steel
Cover Material	Glass
Finishing	Satinless Steel

Technical Specifications

Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0
Switching Cycles	>0
Lifetime Hours	N/A N/A N/Ahrs
Insulation Coverable	N/A

Photometric Specifications

Colour Temperature	N/AK
SDCM	<N/A
CRI	>N/A
Distribution	Direct / Indirect

Logistic Details

EAN / Barcode	3609640155308
Product Weight	600g
Product Dimensions (ODxH / LxWxH)	Ø100 x 130mm
Recess Depth	130mm
Boxed Product Weight	710g
Boxed Product Dimensions (LxWxH)	105 x 140 x 105mm
Outer Carton Boxed Product Quantity	20 pcs
Outer Carton Dimensions (LxWxH)	550 x 240 x 300mm

