




VULCAN™

18W IP67 ADJUSTABLE GROUND LIGHT SMD

- Modular IP67 SMD Recessed Adjustable Wallwasher as the perfect choice for demanding commercial and public outdoor environments.
- Corrosion-resistant aluminium body with 316L stainless steel bezel, A4 stainless steel screws and clear tempered glass diffuser (1.500kg load) with salt-spray protection.
- 30° adjustable via retractable external knob — no need to open the luminaire after installation.
- Supplied with integrated non-dimmable driver and pre-wired 1m H05Rn-F rubber cable for safe and secure installation in outdoor applications.
- Designed for ambient temperatures from -30 °C to +45 °C.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
ODI63259	Non-Dimmable	3000K	19W	1520lm	80lm/W	80

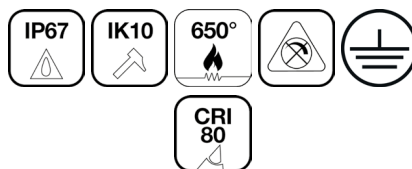

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

VULCAN™

18W IP67 ADJUSTABLE GROUND LIGHT SMD

Specifications and Benefits

Ingress Protection Rating	IP67
IK Rating	IK10
Operating Temperature Range	-30°C / +45°C
Mounting Type	Recessed
Cutout Dimension	min: 170mm - max: 175mm
Certification	CE
Protection Class	Class I
Installation Location	Outdoor
Body Material	Aluminium, Steel
Cover Material	Glass
Available accessories	N/A

Technical Specifications

Wattage	19W
Nominal Voltage	100-240Vac
Frequency	50/60Hz
Power Factor	>0.95
Switching Cycles	>50,000
Lifetime Hours	L70 B50 50,000hrs L80 B20 30,000hrs
Energy Rating	G
Inrush Current	8A

Photometric Specifications

Lumens	1520lm
Efficiency	Up to 80lm/W
Colour Temperature	3000K
Light Colour Definition	Warm White
Beam Angle	30°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640163259
Product Weight	3000g
Product Dimensions (ODxH / LxWxH)	Ø180 x 190mm
Recess Depth	190mm
Boxed Product Weight	3100g
Boxed Product Dimensions (LxWxH)	230 x 230 x 240mm
Outer Carton Boxed Product Quantity	4 pcs
Outer Carton Dimensions (LxWxH)	480 x 480 x 260mm