




RIVO CWS™

RIVOCWS™ WATTAGE & COLOUR SWITCHABLE 11.5W-31W TRACK SPOTLIGHT 55° BEAM ANGLE BLACK FINISH

- Colour & Wattage Switchable Adjustable Three-Circuit Track LED Spotlight designed to deliver flexible, high-quality, and effective lighting for display surfaces.
- Integrated in-track driver ensures a compact, sleek body finish when installed in track systems. Plug-and-play light source design enables quick, easy maintenance at the end of product life.
- Colour & wattage Switchable with switch conveniently located on the track adapter allows simple adjustment of light output and colour temperature, even after installation.
- Flexible aiming with 350° horizontal rotation and 90° vertical tilt, ideal for adapting to changing retail or display environments.
- Interchangeable high-efficiency reflector supplied in 55° beam angle. Opional reflectors available in 18°, 24° and 38°

Code	Version	Colour	Watts	Lumens	lm/W	CRI
RT155841	Non-Dimmable	3000 / 3500 / 4000K	11.5 / 17 / 22 / 31W	1400-3400lm	Up to 123lm/W	90

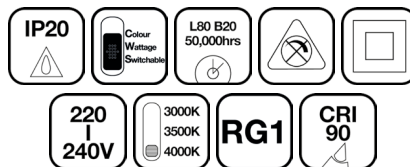

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

RIVO CWS™

RIVOCWS™ WATTAGE & COLOUR SWITCHABLE 11.5W-31W TRACK SPOTLIGHT 55° BEAM ANGLE BLACK FINISH

Specifications and Benefits

Ingress Protection Rating	IP20
Operating Temperature Range	-10°C / +35°C
Mounting Type	3-circuit track
Cutout Dimension	min: N/Amm - max: mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Aluminium
Cover Material	Aluminium
Available accessories	N/A

Technical Specifications

Wattage	11,5/17/22/31
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.95
Switching Cycles	>10,000
Lifetime Hours	L70 B50 72,000hrs L80 B20 50,000hrs
Energy Rating	F
Inrush Current	48A

Photometric Specifications

Lumens	11.5W - /1400 / lm 17W - / 2100 / lm 22W - / 2700 / lm 31W - / 3400 / lm
Efficiency	Up to 123lm/W
Colour Temperature	3000 / 3500 / 4000K
Light Colour Definition	Switchable White
SDCM	<3
Beam Angle	55°
CRI	>90
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640155841
Product Weight	700g
Product Dimensions (ODxH / LxWxH)	Ø80 x 120mm
Boxed Product Weight	740g
Boxed Product Dimensions (LxWxH)	85 x 185 x 158mm
Outer Carton Boxed Product Quantity	24 pcs
Outer Carton Dimensions (LxWxH)	360 x 575 x 340mm

