




ApexMini CWS™

COLOUR AND WATTAGE SWITCHABLE RETAIL WALLWASHER WHITE

- Colour & wattage Switchable compact size adjustable recessed Aluminium LED wallwasher designed to highlight displays and wall features. Perfect for applications that require high quality light output and superior colour rendering. (CRI90).
- Adjustable rotate and tilt angles to adapt to changing point of sale environments. Producing up to 3800 lumens from 30W LED, it is the perfect replacement for metal halide.
- Rotates 350° with a horizontal adjustment of 50°. Supplied with 55° high-efficiency Alanod Reflector. Reflector options in 18°, 28°, 38° or 65° available upon request.
- Non-dimmable flicker-free driver pre-wired for ease of installation.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
RT163488	Non-Dimmable	3000 / 3500 / 4000K	23 / 25 / 27 / 30W	3000-3900lm	Up to 130lm/W	90

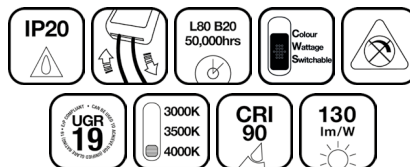

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

ApexMini CWS™

COLOUR AND WATTAGE SWITCHABLE RETAIL WALLWASHER WHITE

Specifications and Benefits

Ingress Protection Rating	IP20
Operating Temperature Range	-10°C / +40°C
Mounting Type	Recessed
Cutout Dimension	min: 120mm - max: mm
Certification	CE
Protection Class	Class II
Installation Location	Indoor
Body Material	Aluminium
Cover Material	Aluminium
Available accessories	N/A

Technical Specifications

Wattage	23/25/27/30
Nominal Voltage	220-240Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>10,000
Lifetime Hours	L70 B50 72,000hrs L80 B20 50,000hrs
Insulation Coverable	NO
Inrush Current	4.82A

Photometric Specifications

Lumens	23W - 2800 / 3000 / 2900lm 25W - 2700 / 3250 / 3000lm 27W - 2940 / 3500 / 3360lm 30W - 3200 / 3900 / 3840lm
Efficiency	Up to 130lm/W
Colour Temperature	3000 / 3500 / 4000K
Light Colour Definition	Switchable White
SDCM	<3
Beam Angle	55°
CRI	>90
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640163488
Product Weight	800g
Product Dimensions (ODxH / LxWxH)	Ø138 x 105mm
Recess Depth	105mm
Boxed Product Weight	820g
Boxed Product Dimensions (LxWxH)	146 x 154 x 117mm
Outer Carton Boxed Product Quantity	18 pcs
Outer Carton Dimensions (LxWxH)	310 x 470 x 365mm

