




ADES[™]

10W IP67 GROUND LIGHT COB

- IP67 COB Recessed Wallwasher as the perfect choice for demanding commercial and public outdoor environments.
- Corrosion-resistant aluminium body with 316L stainless steel bezel, A4 stainless steel screws and clear tempered glass diffuser (1.500kg load) with salt-spray protection.
- Supplied with integrated non-dimmable driver, waterproof junction box for simplified and reliable through-wiring, and 1 m H05RN-F cable.
- Designed for ambient temperatures from -30 °C to +45 °C.

Code	Version	Colour	Watts	Lumens	lm/W	CRI
OD163020	Non-Dimmable	3000K	10W	1050lm	100lm/W	80

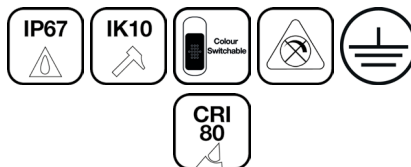

Warranties may be available on certain products as indicated in the product description and are valid from the date of purchase. The warranty is invalid in the case of improper use, installation in an unsuitable working environment, tampering or removal of the Quality Control date label. In the event of product failure during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. SWITCH LITE does not accept responsibility for any installation costs associated with the replacement of this product and reserves the right to alter specifications without prior notice.

ADES™

10W IP67 GROUND LIGHT COB

Specifications and Benefits

Ingress Protection Rating	IP67
IK Rating	IK10
Operating Temperature Range	-30°C / +45°C
Mounting Type	Recessed
Cutout Dimension	min: 135mm - max: 145mm
Certification	CE
Protection Class	Class I
Installation Location	Outdoor
Body Material	Aluminium, Steel
Cover Material	PC
Available accessories	N/A

Technical Specifications

Wattage	10W
Nominal Voltage	100-277Vac
Frequency	50/60Hz
Power Factor	>0.9
Switching Cycles	>50,000
Lifetime Hours	L70 B50 50,000hrs L80 B20 30,000hrs
Energy Rating	G
Inrush Current	7A

Photometric Specifications

Lumens	1050lm
Efficiency	Up to 100lm/W
Colour Temperature	3000K
Light Colour Definition	Warm White
Beam Angle	15°
CRI	>80
Dimming Type	Non-Dimmable
Distribution	Direct

Logistic Details

EAN / Barcode	3609640163020
Product Weight	1340g
Product Dimensions (ODxH / LxWxH)	Ø150 x 120mm
Recess Depth	125mm
Boxed Product Weight	1450g
Boxed Product Dimensions (LxWxH)	165 x 165 x 120mm
Outer Carton Boxed Product Quantity	8 pcs
Outer Carton Dimensions (LxWxH)	520 x 355 x 265mm

